



404855 OPTION-EZ3 ANALOG OUT WL J905

Contains: 404381 circuit board with 403797 harness, keyceptacle, and 2.4GHZ wire antenna radio; hardware.




Instructions:

1. Remove back cover of the indicator.
Unplug beeper.



2. Remove screws from Main circuit board and existing Option circuit board.

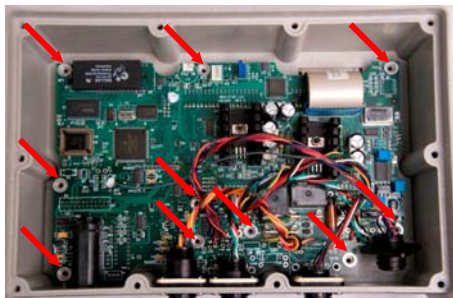

3. If needed, remove the existing J905 harness from the bottom of the housing.

4. If needed, cut holes for J905 connector in the bottom overlay.



5. Move circuit boards up slightly to allow the Datakey keyceptacle to clear the housing.




6. Remove the existing Option circuit board.
7. Attach harness to bottom of housing with screws and screw plate. Check that connector is oriented correctly.






404855 OPTION-EZ3 ANALOG OUT WL J905 (Continued)


8. Place new Option circuit board in housing while connecting P1 to J1 on the Main circuit board.

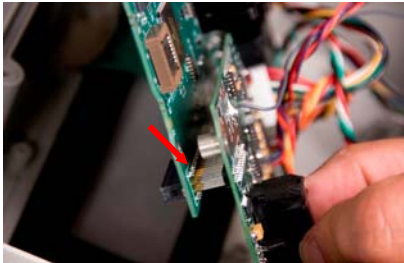

9. Move circuit boards back into position in the housing, lining up the Datakey keyceptacle with the housing. Attach circuit boards to the housing with screws.

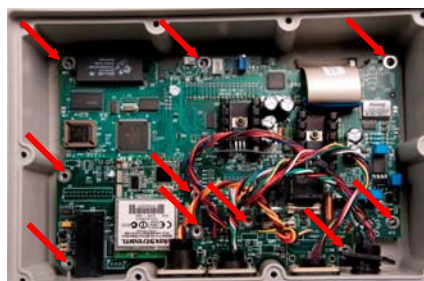

10. Position the radio antenna up from the radio, next to J901.

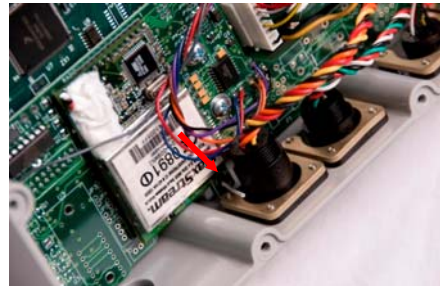

11. Reconnect beeper. Match locking tab.



12. Re-attach rear cover.

13. Change indicator settings to enable the serial port, enable the radio and set up the radio channel.

14. Enable and calibrate analog output if needed per analog manual

