




405297 OPTION-EZ3 INTERNAL 2.4GHZ

Contains 404381 circuit board with 2.4GHZ wire antenna radio; hardware.




Instructions:


1. Remove back cover of the indicator. Unplug beeper.

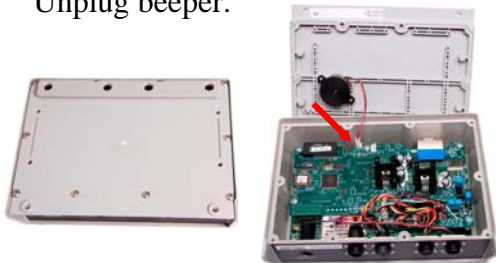

2. Remove 2 screws from Main circuit board.

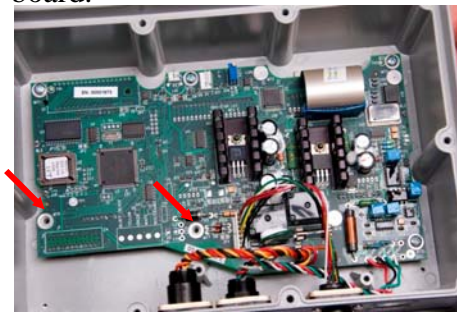

3. Place Option circuit board in housing while connecting P1 to J1 on the Main circuit board.

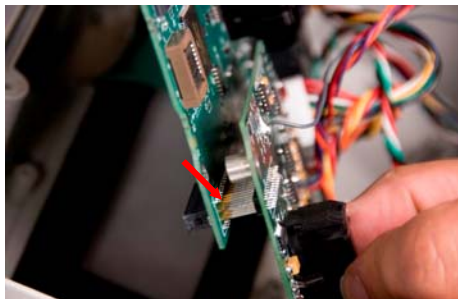

4. Attach to the housing with screws.



5. Position the radio antenna up from the radio, next to J901.



6. Reconnect beeper. Match locking tab.



7. Re-attach rear cover.
8. Change indicator settings to set the clock, enable the serial port, and enable the radio and set up the radio channel.