


### KIT - J904 Printer/Serial Port (P/N 403458)

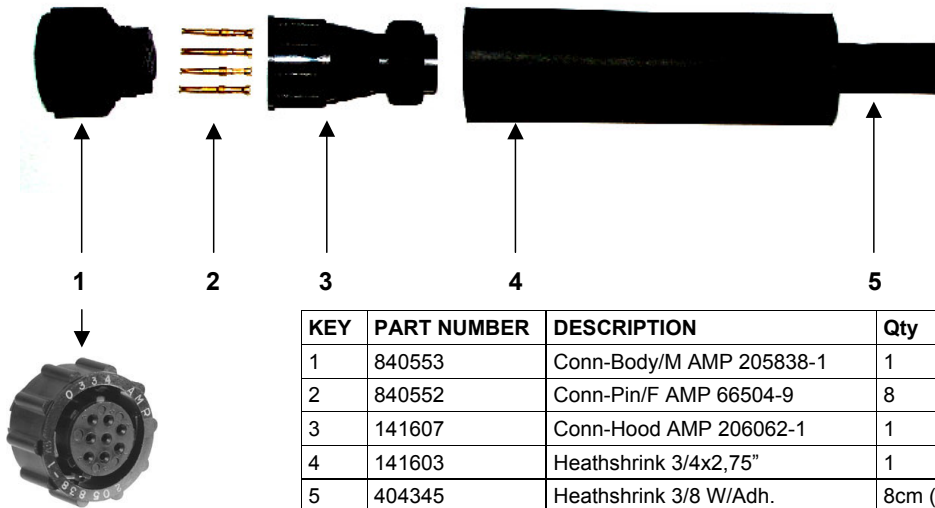

KEY	PART NUMBER	DESCRIPTION	Qty
1	840553	Conn-Body/M AMP 205838-1	1
2	840552	Conn-Pin/F AMP 66504-9	8
3	141607	Conn-Hood AMP 206062-1	1
4	141603	Heathshrink 3/4x2,75"	1
5	404345	Heathshrink 3/8 W/Adh.	8cm (2")
6	D3729	Instructions – J904 Repair Kit	1

### Connections/Anschlüsse/Connexions/aansluitingen

#### Standard connections (J904 RS232) connector

Pin	Function
1	20 mA Current Loop (+)
2	Data to Printer
3	Data input (From Printer)
4	RS232 Scoreboard Data
5	Data Input Signal Ground
6	Printer Signal Ground
7	Scoreboard Signal Ground
8	20 mA Current Loop (-)

#### Continious Serial Communication (Shiftronic)

Pin	Function
2	Signal RS232
6	Ground

#### Analog out 0-20 mA / 0-5 V

Pin	Function
1	Signal 0-20 mA (+) / 0-5V
8	Ground

- Please Note:** Use the enclosed heat shrink to properly seal off the connector, in order to avoid any entering of moisture
- Achtung:** Gebrauchen Sie die beigegefügte Schrumpfhülse um den Konnektor richtig abzudichten, um so Feuchteindringung vorzubeugen.
- Attention:** Appliquez la hausse rétractable ci-joint pour étancher le connecteur correctement, pour éviter la pénétration de humidité
- Belangrijk:** Gebruik de bijgeleverde krimpkous om de connector goed af te dichten om zo het binnendringen van vocht te voorkomen.