



404854 OPTION-EZ3 ANALOG OUT WL J904

Contains 404381 circuit board with 403683 harness, analog components, 2.4GHZ wire antenna radio, and battery; hardware.




Instructions:

1. Remove back cover of the indicator.
Unplug beeper.



2. If the indicator contains an Option circuit board, remove the screws from the Option circuit board. Remove the Option circuit board from the housing.

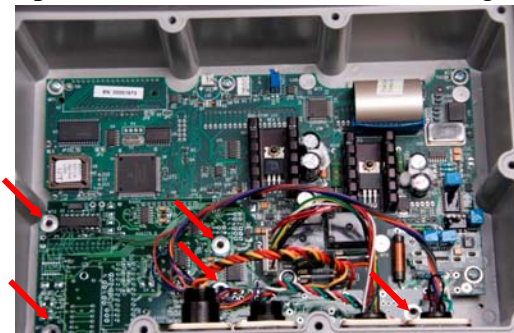

3. If needed, remove the existing J904 harness from the bottom of the housing.


4. If needed, cut holes for J904 connector in the bottom overlay.



5. Attach harness to bottom of housing with screws and screw plate. Check that connector is oriented correctly.



6. Place Option circuit board in housing while connecting P1 to J1 on the Main circuit board.

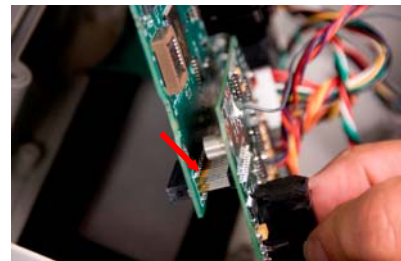



**404854 OPTION-EZ3
ANALOG OUT WL J904
(Continued)**

12. Enable and calibrate analog output if needed per analog manual.

7. Attach to the housing with screws.



8. Position the radio antenna up from the radio, next to J901.



9. Reconnect beeper. Match locking tab.



10. Re-attach rear cover.

11. Change indicator settings to set the clock, enable the serial port, and enable the radio and set up the radio channel.