




405446 OPTION-EZ3 EXTERNAL 2.4GHZ

Contains: 404381 circuit board with 2.4GHZ coax radio; hardware.




Instructions:

1. Remove back cover of the indicator.
Unplug beeper.

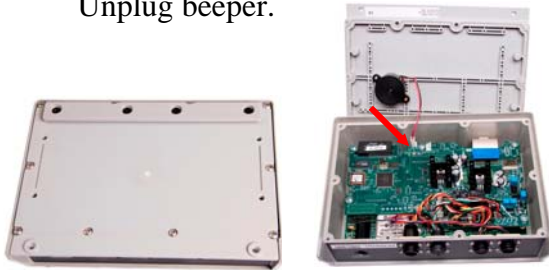


2. Remove screws from Main circuit board and existing Option circuit board.

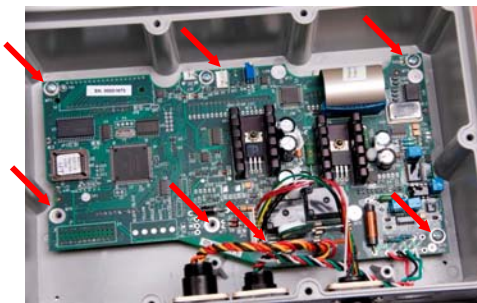


3. Cut hole for radio connector.



4. Place new Option circuit board in housing while connecting P1 to J1 on the Main circuit board.

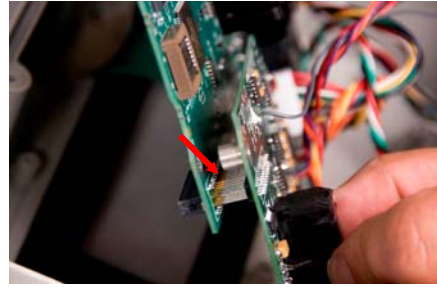

5. Remove nut from radio connector.
6. Move circuit boards up slightly to allow the radio connector to clear the housing.
7. Attach circuit boards to the housing with screws.

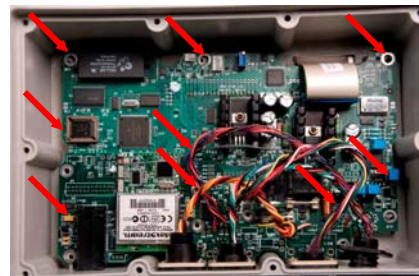

8. Put nut onto radio connector.



9. Reconnect beeper. Match locking tab.



10. Re-attach rear cover.
11. Change indicator settings to enable the serial port, enable the radio and set up the radio channel.